

步入式可程式恒温恒濕試驗室(Programmable Temp.&Humi. Walk-In Chamber)

步入式恒温恒濕試驗室主要由控制面板、配電盤、保濕庫板送風機、加熱器、加濕器、冷凍機組合而成。提供業界大型零件、半成品、成品、溫濕度環境測試，如：計算機終端機，汽車零件。


Constant temperature & humidity chamber is made up of control panel, switchboard, insulation storehouse board, forced draught blower, heater, humidifier, refrigerator. Pffer large-scale part, semi-manufactured goods, finished product, temp & humidity environment test for the manufactory, for instance; computer terminal machine, automobile part.



特点Features:

- 1.工業級觸控可程式多語系控制系統。
- 2.溫濕度設定條件防呆保護。
- 3.特殊送風循環設計，溫濕度均勻性佳。
- 4.德國原裝進口半密閉式環保壓縮機。
- 5.內箱SUS#304，外箱鹽化鋼板組合式設計。
- 6.內底板強化型不銹鋼板。
- 7.大型RO逆滲透自動供水裝置。
- 8.室內可開啓式安全門設計。
- 9.USB 2.0數據儲存接口。

1. Programmable industrial grade controlled multi-language management system;
2. Setting conditions for temperature and humidity, stiff prevention;
3. Special blow circulation design, harmonious temperature and humidity;
4. Imported semi-confined environmental protection compressor made in German;
5. Inner box sus#304, outer box is designed with the combination of salinized steel plates;
6. Inner bottom plate is made of intensified stainless steel plate;
7. Large scale RO reverse osmosis automatic water supply equipment;
8. Indoor open safety door;
9. USB 2.0 data storage interface.

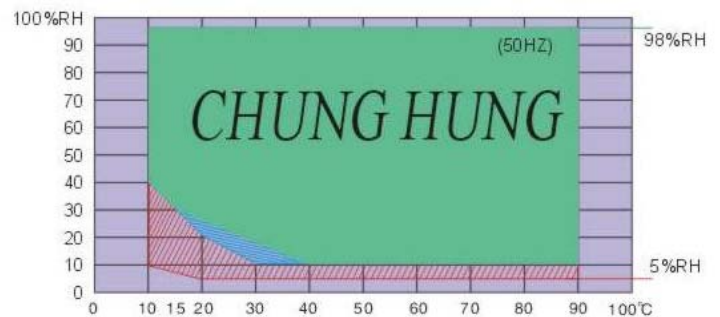

- 綠色區域為50Hz能力範圍。
- 藍色區域為60Hz比50Hz多出的能力。
- 紅色區域為加裝化學除濕的能力範圍。

Model	CH-WI-1	CH-WI-2	CH-WI-3
Inside dimensions(W×H×D)cm	210×210×205	300×210×205	≧390×210×205
Outside dimensions(W×H×D)cm	Peculir	Peculir	Peculir
Cool & Heat range	-40℃, -20℃, -10℃, 0℃ ~ 80℃		
Humidity range	20%RH ~ 95%RH		
Time range	0 hour 1 min ~ 999 hour 59 min		
Temp & Humi resolution	0.01℃ / min, 0.1%RH/ min		
Constancy	± 0.2℃, ± 2.0%RH		